



CoreLine Downlight

DN125B LED20S/830 PSR WH

DN125B - LED Module, system flux 2000 lm - Power supply unit regulating

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. Part of Philips' high-quality CoreLine LED family, the new CoreLine Downlight range of LED products can be used to replace conventional CFL downlights in general lighting applications.

Product data

• General information

Product family code	DN125B [DN125B]
Number of light sources	1 [1 pc]
Lamp family code	LED20S [LED Module, system flux 2000 lm]
Lamp colour code	830 [830 warm white]
Light source replaceable	No [No]
Driver/power unit/transformer	PSR [Power supply unit regulating]
Driver included	Yes [Yes]
Optical cover/lens type	No [-]
Dimmable	Yes [Yes]
Connection	SCREW [Screw connector]
Protection class IEC	CL I [Safety class I]
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Diameter	D200 [200 mm]
Colour	WH [White]
Standard RAL colour	RAL9010 [Pure white]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
CE mark	CE [CE mark]
ENEC mark	No [-]

• Electrical

Input voltage	220-240 V [220 to 240 V]
Input frequency	50-60 Hz [50 to 60 Hz]

• Mechanical

Housing material	ALU [Aluminium]
Reflector material	ALU [Aluminium]

• Initial perform. (IEC compliant)

Initial input power	24 W [24 W]
Initial luminous flux	2000 Lm
Initial LED luminaire efficacy	80 Lm/W
Lamp colour temperature	3000 [3000 K]
Colour Rendering Index	>80 [>80]
Initial chromaticity	(0.44, 0.41) SDCM <5

• Over time perform. (IEC compliant)

Median useful life L90B50	15000 hr
Median useful life L80B50	30000 hr
Median useful life L70B50	50000 hr
Driver failure rate at 5000 h	1.5 %

• Application conditions

Average ambient temperature	T25 [+25 °C]
Ambient temperature range	+10 to +40°C [+10 to +40 °C]
Maximum dim level	1%-ELV [1% (depends on dimmer, ELV)]



PHILIPS


CoreLine Downlight

Suitable for random switching Yes [Yes (relates to presence/movement detection and daylight harvesting)]


Bar code on pack - EAN1 8710163294896
Bar code on outerbox - EAN3 8710163294933
Logistic code(s) - 12NC 911401799201
Net weight per piece 0.560 kg

• Product Data

Order code 294896 99
Full product code 871016329489699
Full product name DN125B LED20S/830 PSR WH
Order product name DN125B LED20S/830 PSR WH
Pieces per pack 1
Packs per outerbox 6



Dimensional drawing

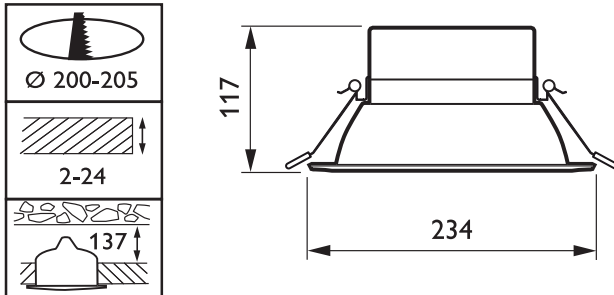

DN125B LED20S/830 PSR WH



© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, March 24
data subject to change